


Material Datasheet

Recycled Compound

PTT-MMSC0715 - A self-colour, medium MFI PP from predominantly post-consumer sources, suitable for injection moulding and compounding applications.

PLASgran Recycled Compounds are **high quality** compounded polymers produced from controlled blends of recycled materials, to **defined specifications**.

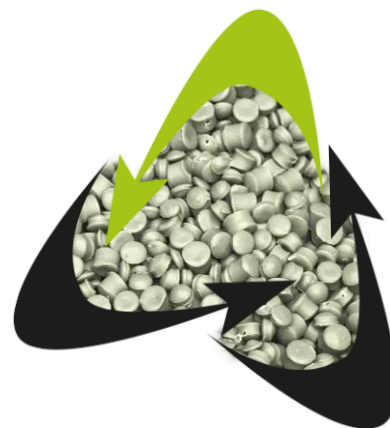

Property	Test Methods	Test Conditions	Typical Values	Unit
Melt Flow Index	ISO 1133	2.16kg / 230° C	11	g/10 min
Density	ISO 1133		0.903	g/cm ³
Moisture	INTERNAL		0.08	%
Izod Impact Strength	ISO 180	Notched, 23° C	5	KJ/m ²
Flexural Modulus	ISO 178	10mm / min	1400	MPa
Tensile Stress @ Yield	ISO 527	50mm / min	23	MPa
Ash Content	INTERNAL	400° C / 30 mins	3	%
Colour	Visual Inspection		Self-Colour	

Additional Information	Options
------------------------	---------

Packaging Types Available

25Kg Bag

Bulk Bag

Bulk Tanker

Octabins

****NB**** The property details shown above are typical of the material type and are for guidance only. They do not constitute specification limits. Variances from the above information may occur and no guarantee can be provided or implied due to the factors that may or will influence the processing of the material and varied material sources to produce the material. The above information does not relieve the processor(s), user(s) and product manufacturer(s) of the requirement to carry out their own specific testing.